

Drainage Channel Pro – Height Adjustable




DATA

- Body: Galvanised steel with super corrosion protection or stainless steel 1.4301
- Width: 100* mm
155 mm
200 mm
250 mm
- Length: 1000 mm
1500 mm
2000 mm
- Height adjustment: 63 mm fix
73 - 103 mm
93 - 143 mm
113 - 183 mm

*on 100 mm width off-size heights

FEATURES

- For a safe drainage of flat roofs, green roofs and terraces
- Reduced connection height of 5 cm according to DIN 18195 and the directives for flat roofs, e.g. in the range of doors
- Easily to adjust with a screwdriver from the topside
- For a quick laying in alignment by coupling elements
- Robust and compact drain body, can be cut to length on request due to displaceable stands
- New width 155 mm according to German flat roof guidelines 12/2016

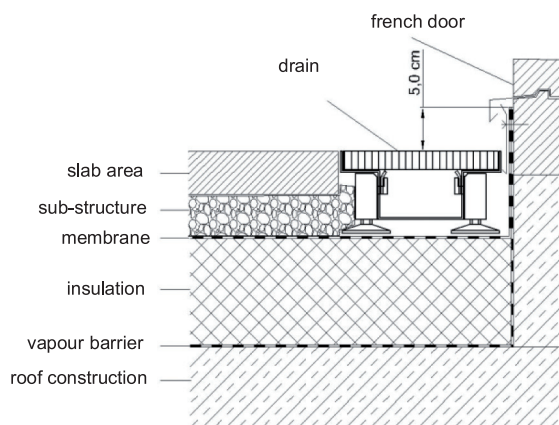

MOULDINGS AND ACCESSORIES

- Corner moulds
- T-Fittings
- End caps
- Gully tops
- Connection profile
- Grid locking
- Branch canal

DIMENSIONS ON REQUEST

- Length up to 3000 mm
- Width from 100 mm up to 500 mm
- Moulds for polygonal laying
- Round arches with radius on request

SUGGESTION FOR A TENDER

__ rm drainage channel Pro

compact body with integrated drainage trims,

- | | | | | |
|--------------------|-------------------------------------|--|--------------------------------------|-------------------------------------|
| Raw Material: | <input type="checkbox"/> galvanised | <input type="checkbox"/> stainless steel | | |
| Grating: | <input type="checkbox"/> mesh grid | <input type="checkbox"/> perforated grid | <input type="checkbox"/> linear grid | <input type="checkbox"/> cross grid |
| Width: | <input type="checkbox"/> 100 mm | <input type="checkbox"/> 155 mm | <input type="checkbox"/> 200 mm | <input type="checkbox"/> 250 mm |
| Length: | <input type="checkbox"/> 1000 mm | <input type="checkbox"/> 1500 mm | <input type="checkbox"/> 2000 mm | |
| Adjustable height: | <input type="checkbox"/> 63 mm fix | <input type="checkbox"/> 73-103 mm | <input type="checkbox"/> 93-143 mm | <input type="checkbox"/> 113-183 mm |

can be cut to length on request, due to displaceable stands with clip-fixation, stainless steel kick plate, stands easily to adjust from the topside, to deliver and to install professionally

*09/2019