


Gravel Stop Basic

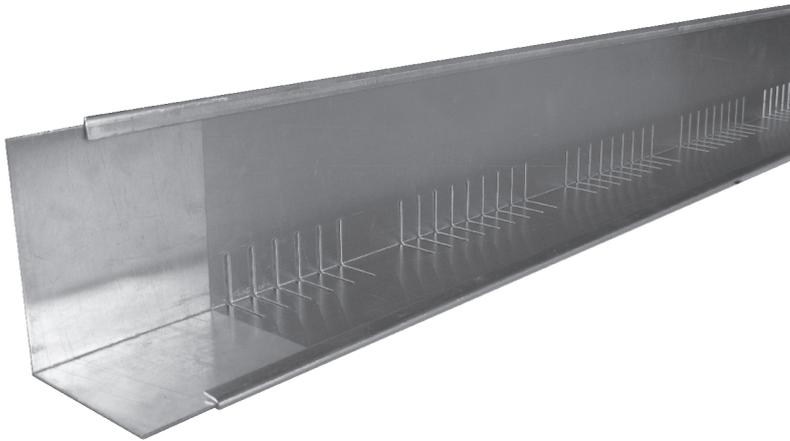


FEATURES


- Gravel stops for clear boundaries of green roofs
- The different heights of the journals allow to use the gravel stop on different heights of construction
- Quick and aligned laying due to joint connectors
- The gravel stops get fixed by the load of the green roof

DATA

Raw Material:	Aluminium
Height of journals:	Height A / Height B 80 mm / 100 mm 120 mm / 150 mm
Length:	2000 mm
Thickness:	1.2 mm
Folding:	Three times

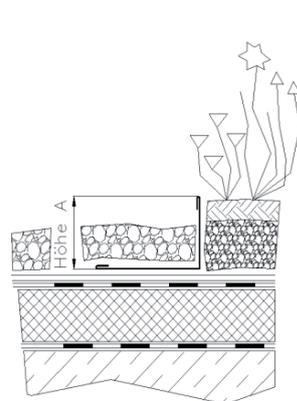

Installation height A

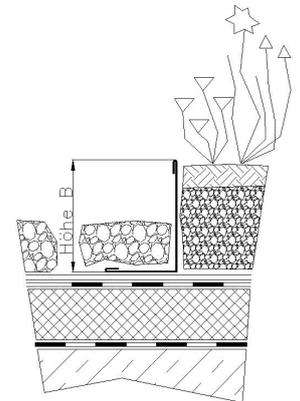

Installation height B

SUGGESTION FOR A TENDER

__rm gravel stop Basic

Raw material:	<input type="checkbox"/> aluminium
Height of journals:	<input type="checkbox"/> by default for two construction heights <input type="checkbox"/> 80 / 100 mm <input type="checkbox"/> 120 / 150 mm
Length:	<input type="checkbox"/> 2000 mm
Drainage capacity:	<input type="checkbox"/> about 81 cm ² /rm

to deliver and to install professionally.

Proof of delivery: 6 fuers Gruen GmbH - Kanalstrasse 2 - D-66130 Saarbruecken
Phone (+49) 06 81 / 9 60 21 46 – 0 – Fax (+49) 06 81 / 9 60 21 46 – 26
E-Mail info@6-f-g.de - www.6-f-g.de