


Gravel Stop Profi

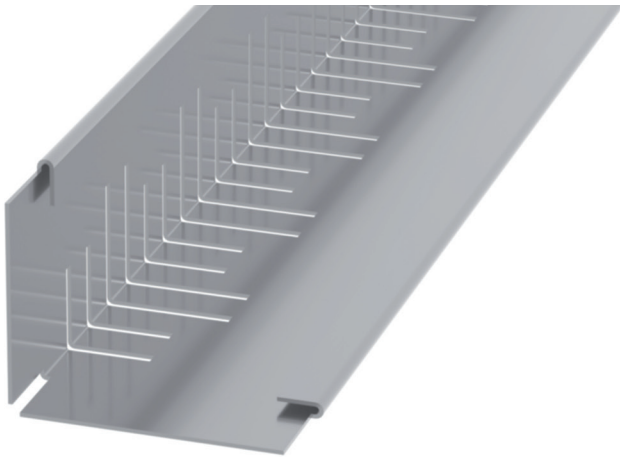


FEATURES

- Gravel stop for clear boundaries of green roofs
- The different heights of the journals allow to use the gravel stop on different heights of construction
- Quick and aligned laying due to integral joint connectors
- The fixation of the gravel stop can be carried out with an assembling retainer which will be bonded with the sealing or by the load of the green roof
- Corner moulds 90°, special connectors on demand

DATA

- Gravel stop: Aluminium or stainless steel
- Height of journals: Height A / Height B
 - 60 mm / 80 mm
 - 80 mm / 100 mm
 - 100 mm / 120 mm
 - 120 mm / 150 mm
- Length: 2500 mm
- Thickness: 1.0 mm on 60 / 80 mm + 80 / 100 mm
1.2 mm on 100 / 120 mm + 120 / 150 mm
- Folding: Outer edges folded

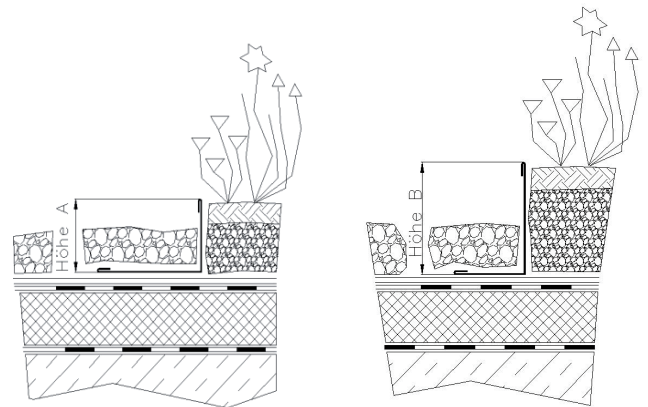

Installation height A

Installation height B

MOULDINGS AND ACCESSORIES

- Assembling retainers
- Corner connectors
- Arch connectors

SUGGESTION FOR A TENDER

lfm rm gravel stop Profi

- Raw material: aluminium stainless steel
- height of journals: by default for two construction heights
 60 / 80 mm 80 / 100 mm 100 / 120 mm 120 / 150 mm
- Length: 2500 mm
- to deliver and to install professionally.

Proof of delivery: 6 fürs Grün GmbH – Kanalstraße 2 – D-66130 Saarbrücken
 Phone (+49) 06 81 / 9 60 21 46 - 0 – Telefax (+49) 06 81 / 9 60 21 46 - 26
 E-Mail info@6-f-g.de - www.6-f-g.de

DIMENSIONS ON REQUEST

- Special length
- Special height
- Special thickness

*07/2023