


Inspection Chamber Pro – Foldable



1 Condition upon delivery

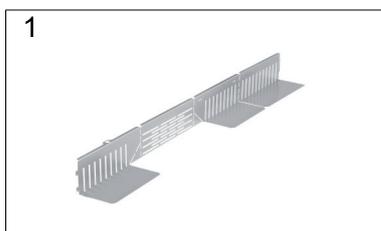

2 Folding of the inspection chamber



3 Inserting the joints

Corner joint


Inserting the straight plates into the retainers and bending them



4 Putting on the top cover



5 Also usable with extension chamber

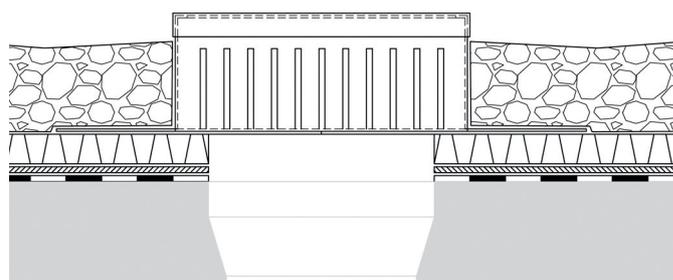

Installation details of inspection chamber

DATA

- Body: Aluminium, t = 1.50 mm with paint coating
- Top cover: Galvanised steel sheet with paint coating t = 1.50 mm
- Measurement: 250 mm x 250 mm
- Height: 100 mm
- Colour: RAL 9007 (grey aluminium)

FEATURES

- Drains can be controlled and cleaned without bigger effort anytime. For safe and steady drainage of green roofs
- Extremely space saving and easily to transport
- Robust construction made of aluminium and galvanised steel sheet
- Wide pressure distributing support-flange
- Also usable next to parapets
- With stable top cover

SUGGESTION FOR A TENDER

__ pcs inspection chamber Pro

foldable, colour coated RAL 9007, with wide pressure distributing support-flange and stable top cover

Measurement: 250 mm x 250 mm

Height: 100 mm

Raw Material: Chamber made of aluminium (t = 1.50 mm)

Top cover made of galvanised steel sheet (t = 1.50 mm)

*06/2018