

Gully Top Frame Pro




FEATURES

- Gully top frame with integrated water strainer
- Height easily to adjust from the topside
- 4 options to connect with our drains. The ports can be broken out easily on site.
- The gully top frame can also be used separately as well as system-independent.
- Extension panel easily to cut with tin snips to desired height

DATA

- Body: Galvanised steel with super corrosion protector or stainless steel
- Dimension: 250 x 250 mm
400 x 400 mm
- Height Adjustment: 73 - 103 mm
93 - 143 mm
113 - 183 mm

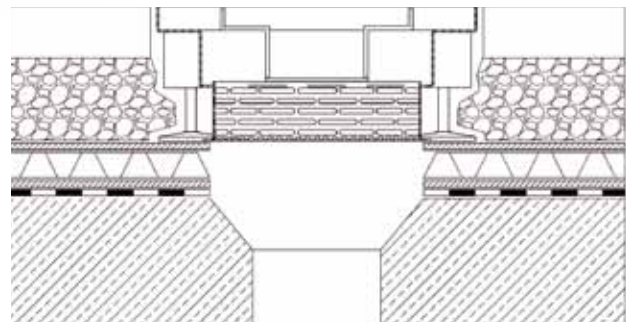

DIMENSION ON REQUEST

- Dimension: 500 x 500 mm

SUGGESTION FOR A TENDER

__psc gully top frame Pro

- Dimension: 250x250 mm 400x400 mm
- Raw material galvanised steel with super-corrosion protection stainless steel
- Grating: mesh grid perforated grid flat course grating
- Adjustable height: 73-103 mm 93-143 mm 113-183 mm

Connection with drains possible on 4 sides, incl. water strainer made of stainless steel, to deliver and to install professionally

Proof of delivery: 6 fuers Gruen GmbH - Kanalstrasse 2 - D-66130 Saarbruecken
Phone (+49) 06 81 / 9 60 21 46 - 0 - Fax (+49) 06 81 / 9 60 21 46 - 26
E-Mail info@6-f-g.de - www.6-f-g.de