

Gravel Stop Pro




FEATURES

- Gravel stop for clear boundaries of green roofs
- The different heights of the journals allow to use the gravel stop on different heights of construction
- Quick and aligned laying due to joint connectors
- The fixation of the gravel stop can be carried out with an assembling retainer which will be bonded with the sealing or by the load of the green roof
- Corner moulds 90°, special connectors on demand

DATA

- Gravel stop: Aluminium or stainless steel
- Height of journals: Height A / Height B
50 mm / 80 mm
80 mm / 120 mm
100 mm / 150 mm
- Length: 2000 mm
- Thickness: 1.5 mm
1.2 mm (on 50 / 80 mm)
- Folding: Five times

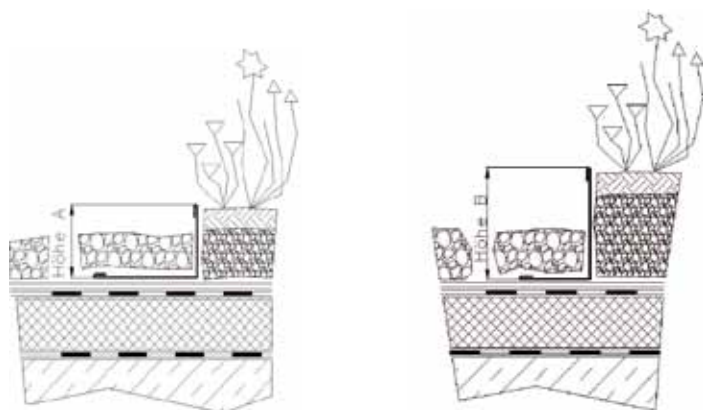

Installation height A

Installation height B

MOULDINGS AND ACCESSORIES

- Assembling retainers
- Special connectors
- Arch connectors
- Joint connectors

SUGGESTION FOR A TENDER

___m gravel stop Pro

- Raw material: aluminium stainless steel
- Height of journals: by default for two construction heights
 50 / 80 mm 80 / 120 mm 100 / 150 mm
- Length: 2000 mm

to deliver and to install professionally.

Proof of delivery: 6 fuers Gruen GmbH - Kanalstrasse 2 - D-66130 Saarbruecken
Phone (+49) 06 81 / 9 60 21 46 - 0 - Fax (+49) 06 81 / 9 60 21 46 - 26
E-Mail info@6-f-g.de - www.6-f-g.de

DIMENSIONS ON REQUEST

- Length between 1000 mm up to 3000 mm
- Any heights of journals