

- Green Roofs
- Artificial Turf
- Natural Ponds
- Garden Lighting
- Flat Roofing
- Road Construction

Tile Spacers FG

Description

Tile spacers are used for an exact and quick laying of concrete paving slabs. They guarantee a homogeneous appearance of the joints. Tile spacers moreover ensure the drainage of the surface and avoid the slide of the paving slabs in the bracing.

Application

On terraces, roofs and buildings flagging has to be build with open joints. In this case tile spacers care for a quick laying. They ensure the drainage of surface water and they guarantee a homogeneous appearance of the joints.

Features

As a special advantage of the FG tile spacers slabs can be substituted quickly and easily after installation. The chamfered edges on the top side care for an exchange of the slabs without effort. During application of the slabs it therefore has to be taken notice that the spacers face upside with the chamfered edges.

Installation

Place the tile spacers on the subgrade and clamp them tightly between the slabs. The required quantity of tile spacers depends on the size of the slabs and the laying pattern.

FAQs

Have the tile spacers to be removed after installation?

For an application with open joints it is important that the joints remain open in order be capable to drain surface water quickly. The tile spacers avoid sliding of the paving slabs and thus will not be removed after installation of the flagging.

How many tile spacers are required?

This depends on the measurement of the slabs and the laying pattern. For a laying with cross joints you have to calculate with 1.25 tile spacers per slab.

Are tile spacer also suitable for laying besides roof areas?


Yes they are. They care for a quicker installation of flagging and for a homogeneous appearance of the joints.

Do I need a chipping bed for implementing FG UFO tile spacers in outdoor areas?


The biggest advantage of FG UFO tile spacers is that you don't need to build a chipping bed. Personnel cost and material cost for a chipping bed can hence be saved.

Can I use FG UFO next to the wall?

Due to the special design FG UFO can easily be used next to the wall. You simply break the thin journal of the tile spacer. Pose the remaining tee at the edge of the slab. When you are working in an edge of the area you can also use the slice without the tile spacer under the slab.

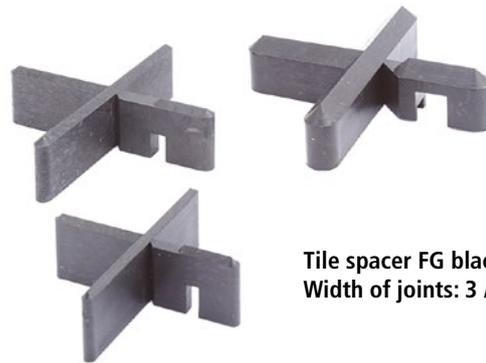

Tile spacer FG black
Width of joints: 3 / 5 / 10 mm




Tile spacer FG transparent
Width of joints: 3 / 5 / 10 mm



Tile spacer FG UFO for thin ceramic and concrete slabs (available in black or grey)
Width of joints: 3 / 5 mm

No special tool is required for the application.

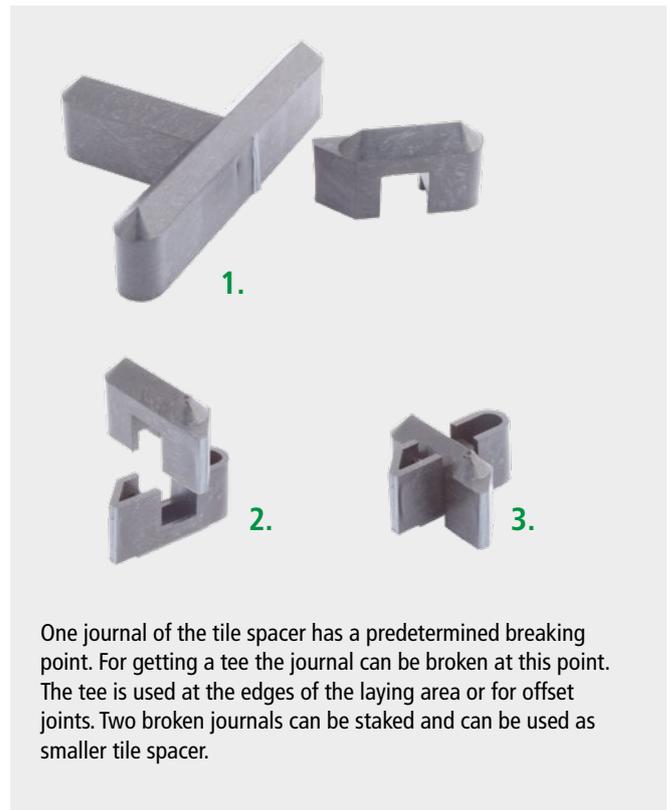

One journal of the tile spacer has a predetermined breaking point. For getting a tee the journal can be broken at this point. The tee is used at the edges of the laying area or for offset joints. Two broken journals can be staked and can be used as smaller tile spacer.